



the passion for moving

JESPI

Z105.720



5,5 km/h



1.000 kg



3.000 kg



30 %



- For loads up to 1.000 kg.
- Pneumatic wheels for indoor and outdoor use.
- 5 levels speed selector.
- Wide range of loading platforms.



Scan this QR code
for more information

ZALLYS srl
Via Palazzina 1 | 36030 Sarcedo (VI) - ITALY
www.zallys.com | sales@zallys.com



METALLURGICAL INDUSTRY



CONSTRUCTION WORKS



CEMETERIAL



OFFSHORE AND OIL




GREEN MAINTENANCE



Scan this QR code
to see all applications

ZALLYS srl
Via Palazzina 1 | 36030 Sarcedo (VI) - ITALY
www.zallys.com | sales@zallys.com

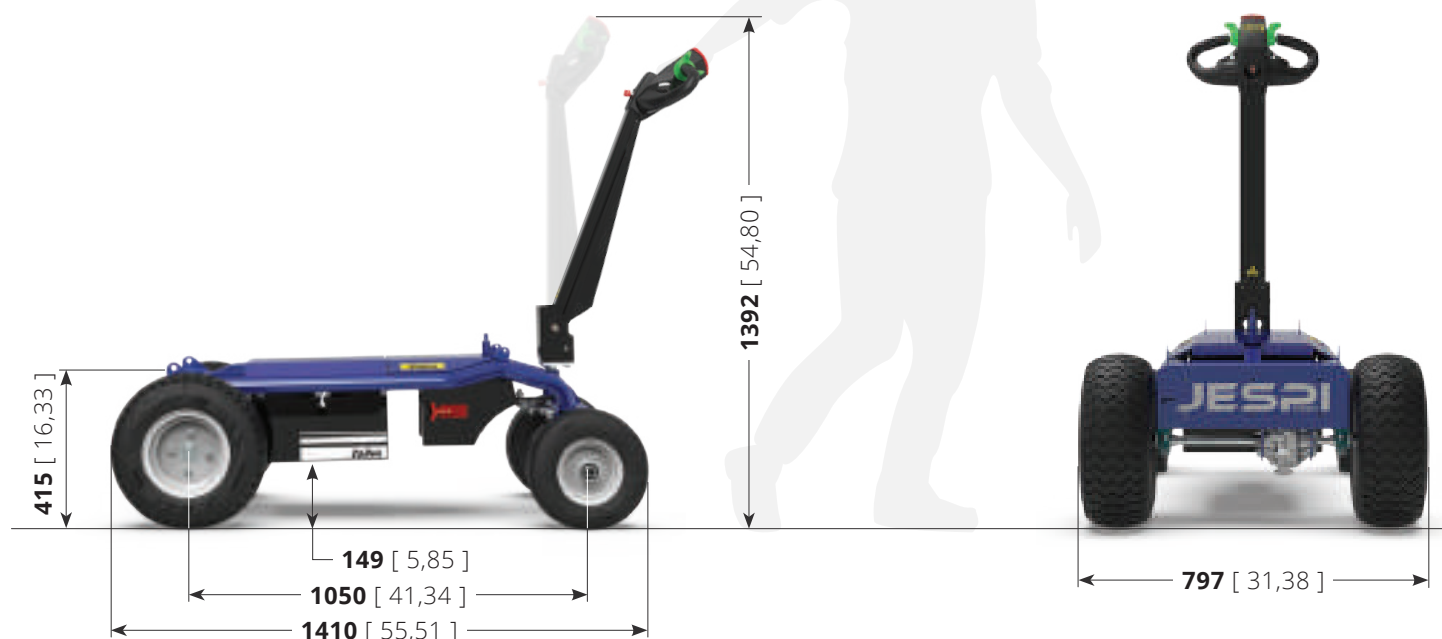

TECHNICAL DATA

Drive controls

Description	U.M.	Value
Type of control		Tillerhead

Safety

Description	U.M.	Value
Dead man safety system		Sensor on tiller head
Emergency reverse button		On tiller head
Power Emergency stop		Detachable power connector

Performances

Description	U.M.	Value
Max. forward speed	km/h	5,5
Max. backward speed	km/h	5,5
Max.towing capacity on flat ground	kg	1.000
Max.slope with load	%	30
Stopping distance in deceleration (without load)	m	1,1

Battery

Description	U.M.	Value
Batteries type		Traction AGM batteries
Battery voltage	V	12
Nominal Capacity 20 h	Ah	130
Battery charger		External - high frequency

Motor

Description	U.M.	Value
Engine		Electric
Electricity		Direct
Engine voltage	V	24
Rating (S2 - 5')	kW	1
Maximum peak power	kW	2,20

Dimensions and Weight

Description	U.M.	Value
Weight incl. with batteries	kg	146
Length	mm	1.410
Width	mm	797
Height	mm	1.392
Loading platform height	mm	415
Wheelbase	mm	1.050
Turning circle	mm	4.000

Wheels

Description	U.M.	Value
Tyres		Pneumatic
Optional Tyres		Super-elastic non-marking



Scan this QR code
for more technical data

ACCESSORIES

Loading platforms for every need and tow hooks

JESPI has a wide range of **different sized loading platforms** to fulfill every transport need. All standard platforms have **3 removable sides** to make easier the loading of materials. Moreover, it's possible to equip JESPI with any kind of customized machinery or equipment. It can be equipped with **hooks** for towing trolleys up to **3.000 kg**.



PLATFORM
720 x 1325 x h185 mm
890 x 1325 x h185 mm




PLATFORM
720 x 1325 x h385 mm
890 x 1325 x h385 mm



BALL/PIN HITCH
Ø20-25

Performance on slopes

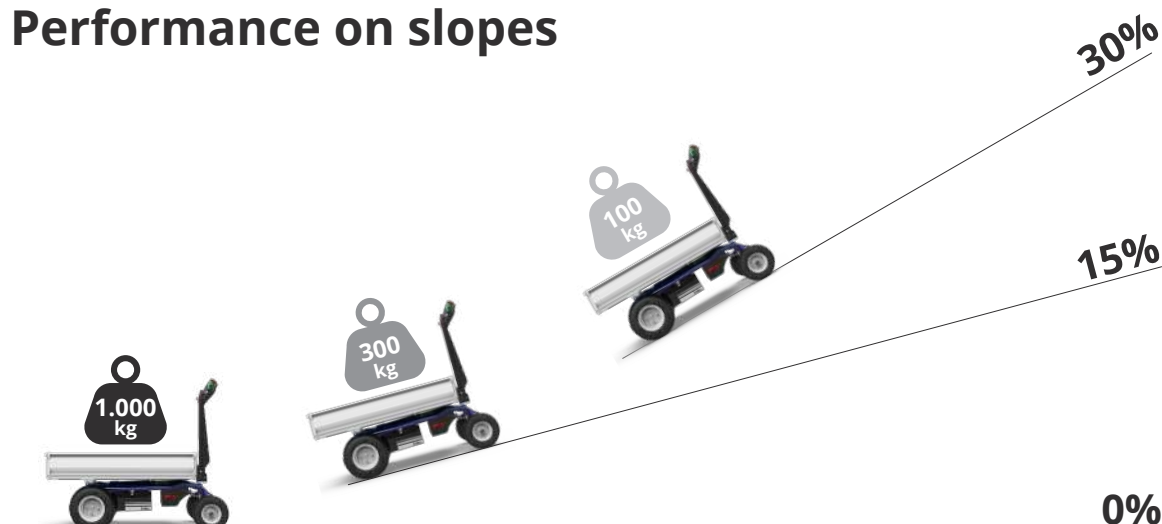

Scan this QR code
to see all accessories